


Flexible connection inlet/outlet (code EMMT-03)



Flexible connection made of woven fabric for connection to a duct.

Length: 110–150 mm.


Designed for connection to an EMMT-02 connection frame.

Outdoor version (code EMMT-04)

Outdoor version implies that the fixed panels are supplemented with external sealing strips.

- Supplied with necessary cover strips for the joints between the air handling unit sections.


Support frame (code EMMT-05)



Floor support frame for use as a base for modules and functional sections.


- The support frame consists of extruded, profiled, anodized aluminium sections. The profiled sections are to be assembled by means of bolts.
- Available with or without adjustable feet.
Height: 195–245 mm, adjustable feet.
- Height: 100 mm, without feet.
- Length and width according to specification in IV Produkt Designer product selection program.

Inspection window (code EMMT-11)

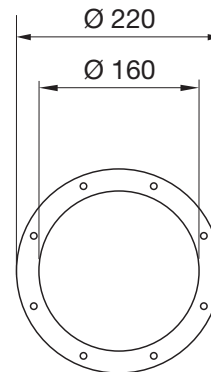

The inspection window consists of inner and outer plexiglas panes. For casing 00 only (standard insulation) and module lengths larger than 10.

Interior light fitting (code EMMT-07)



Light fitting supplied mounted in the relevant unit section with two meter long cable in the armature. The switches of the light fittings should be located at the same spot as the other light switches in the fan room.

- The armature consists of a base made of polycarbonate with aluminium reflector and ribbed glass cover protected by steel wire mesh.
- Enclosure class IP44.
- Height: 175 mm, Width: 120 mm, Depth: 115 mm.