

## Valid for Emotron EMX P10 control unit for rotary heat exchangers

This is a supplement to the instruction manual for Emotron EMX-P10 with document number: 01-3092-01r3

### Activation of special software

In installations with problems such as unpleasant smells during summer, there is now a solution. Instead of normal operation with purging it is now possible to run continuously at low speed and thus prevent odours.

The function continuous operation at low speed is activated by setting the DIP-switch 3, see Fig. 2.

- DIP 3 "OFF" means normal voltage or current input and normal operation with purging.
- DIP 3 "ON" means operation without purging, running continuously at low speed if the control signal is below 1.5 V.

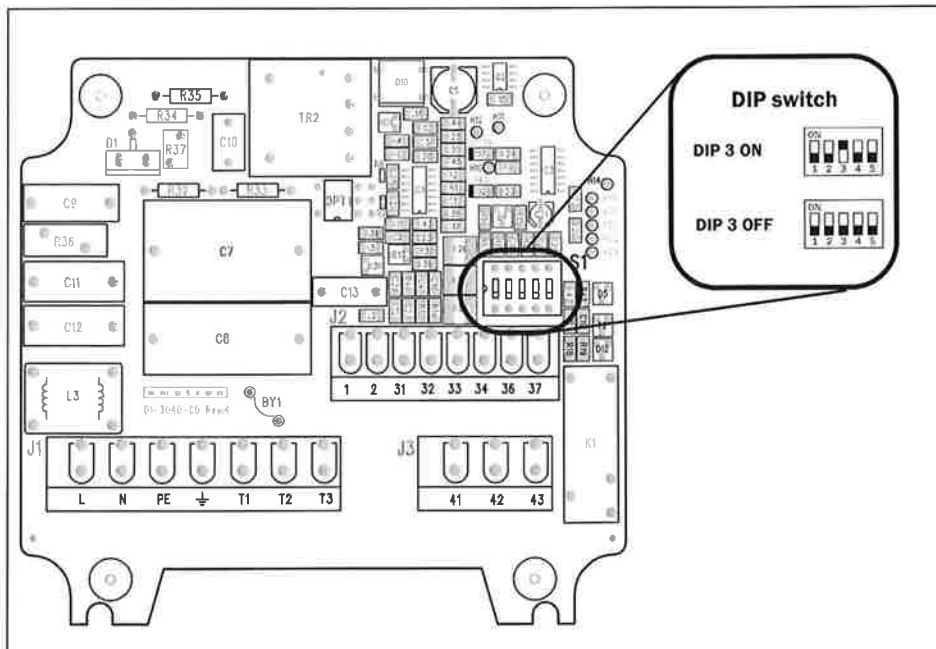


Fig. 2 DIP switch