


Lifting bracket (code EMMT-08)




The lifting bracket must be inserted into the groove provided in the aluminium profile, fit the load safety and the module is ready for lifting.

Supplied as a set of four brackets.

Bottom plate (code EMMT-09)

Bottom plate made of acid-proof steel.


One-piece version (code EMMT-10)

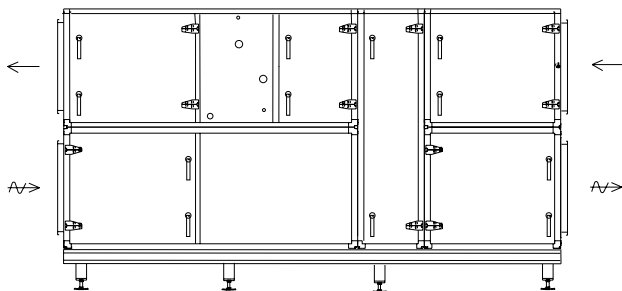

All the types of air handling unit in the Flexomix series up to and incl. size 600 are available as one-piece units.

- All the component functional sections are supplied mounted on an EMMT-05 support frame. Max. permissible length: 6000 mm.
- Length, width and height can be obtained from the IV Produkt Designer prod. selection software.

Thermometer (code EMMT-16)

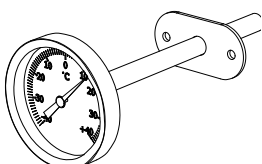


Direct reading, insertion thermometer. Temp. range: -40 to +40 °C.

Duct damper (code EMT-01)

Duct damper designed for the EMMT-02 connection frame and intended for use as a shut-off or regulating damper.

- The louvre damper is made of aluminium profiles and meets the provisions of corrosion class C4 to SS-EN ISO 12944-2.
- The damper blades are driven by ABS plastic gear wheels and a silicone rubber O-gasket achieves tightness between the damper blades.
- Permissible temperature: -40 to +80 °C
Permissible differential pressure: max. 1400 Pa.
- Tightness type 3 to SS-EN1751 (VVS AMA-98).

Dimensions

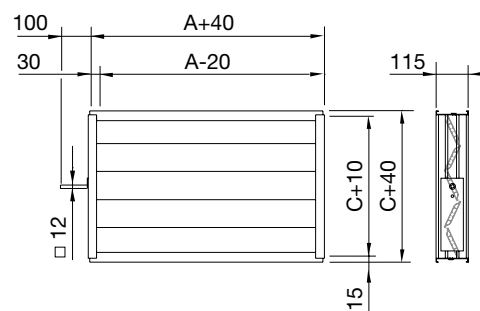

Size	Dimension (mm)	
	A	C
060	500	300
100	700	300
150	800	500
190	1000	500
240	1000	600
300	1200	600
360	1200	800
480	1400	800
600	1600	800
740	2000	900
750	1600	1000
850	2200	1000
950	1600	1200