Climatix Hand-held Terminal

⬤ INFO Information

Press – shows **Start Page** in the display window

No light
Unit stopped

Solid green light
Normal operation

Solid orange light
Emergency stop

Flashes green
Start-up, night mode test, night-cooling or night-heating mode

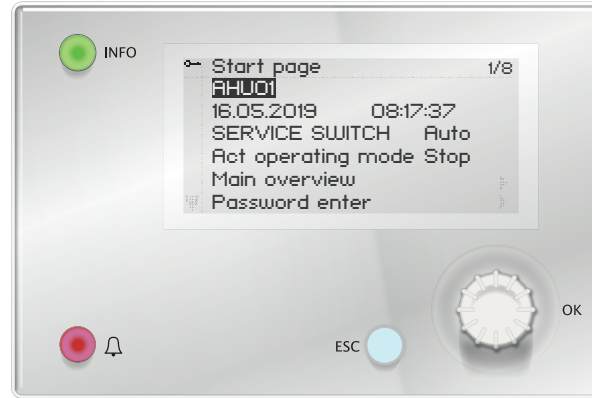**Flashes orange**
Fire damper exercise cycle

Alternating green and orange
Off or manual control

Flashes red
Emergency operation, such as in the event of fire or refrigerant leakage

---

Display window

```
INFO    ⬤        🔒 Start page          1/8
                   AHU01
                   16.05.2019      08:17:37
                   SERVICE SWITCH    Auto
                   Act operating mode Stop
                   Main overview
         🔔 ⬤      Password enter
                                        ESC  OK
```

🔴🔔 Alarm

Flashes red
Active alarm

OK Navigation and confirmation

Turn – changes a value

Turn to the right – moves down through the menus

Turn to the left – moves up through the menus

Press – shows a menu or confirms a value

Press and hold – shows **PIN handling**

ESC ⬤ ESC – return

Press – shows the previous menu or cancels the current action

---

Starting and stopping the unit

1. Turn navigation ⟳ until **SERVICE SWITCH** is highlighted.

2. Press navigation 👆 to confirm.

3. Turn navigation ⟳ to the desired option:

   AUTO — The unit starts ands stops via the time scheduler or other operating functions

   OFF — The unit stops

4. Press navigation 👆 to confirm.

Sign in

1. Turn navigation ⟳ until **Password enter** is highlighted.

2. Press navigation 👆 to confirm.

Turn ⟳ and press navigation 👆 until the code **1000** appears.

Correct sign in is indicated by a key ⚿ displayed in the top left-hand corner.

Control system functions

Alarm reset

1. Press alarm 👆🔔.
   Current alarms are listed in the display window.

2. Press alarm 👆🔔 again.
   Acknowledge will appear in the display window.

3. Press navigation 👆 and select **Execute.**

4. Press navigation 👆. The alarm is now reset.

IV PRODUKT